

Water Treatment



TM 07 SERIES

MOTOR DRIVEN MECHANICAL DIAPHRAGM METERING PUMP



TM 07 series is a new motor driven mechanical diaphragm metering pump featuring a vertically mounted, high efficiency and high performing motor, within a PVC housing. Enhanced by its dual cam mechanical structure, the pump guarantees high stability, dosage and low noise.

Characteristics

- **REDUCED** dimension of the base for easier installation
- **ROBUST PLASTIC OUTER CASE**
- **HIGH EFFICIENCY MOTOR 0.06KW**



Water Treatment



TECHNICAL SPECIFICATIONS

Flow rate: up to 120 lt/h

Max pressure: 5 bar

Motor: 0.06 kW-3ph IP55 380Vac 50-60Hz

Motor: 0.06 kW-1ph IP55 110÷220Vac 50Hz

Stroke rate: 144 strokes/minute

Stroke length: 5-6.8 mm

Diaphragm diameter: 70mm

Pump head: SS 316/PVDF

Max temperature: SS316 80°C/ PVDF 40°


FPM or EPDM seals available



Water Treatment



DIMENSIONS

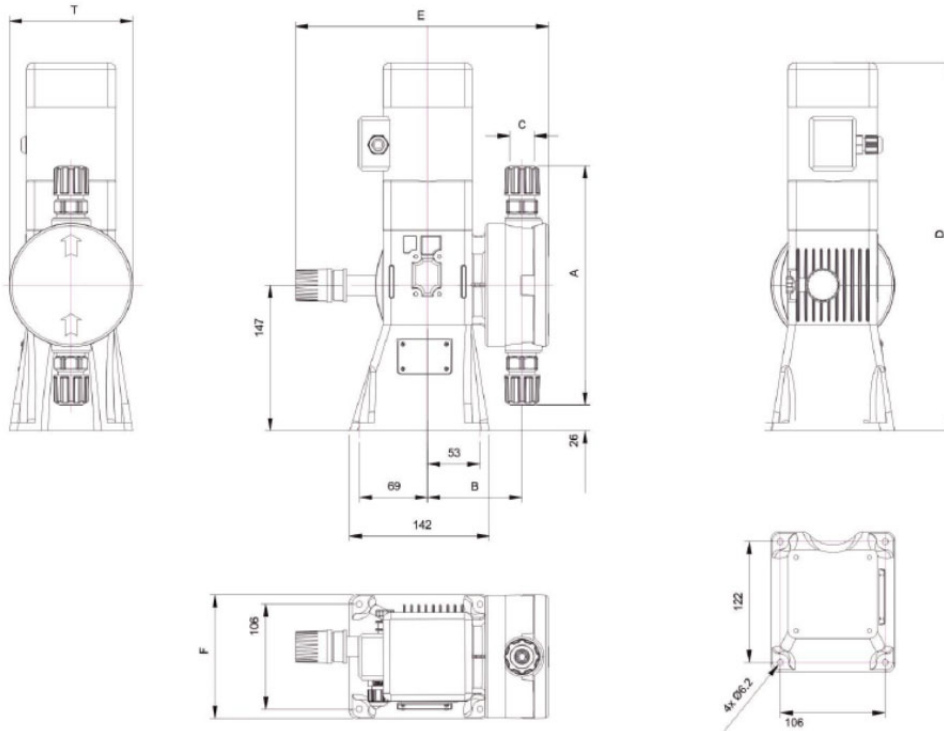

A [mm]	B [mm]	C [BSP / mm]		T[mm]	Single / Three Phases motor		
		D[mm]	E [mm]		F [mm]		
242	93.5	AISI 316	1/2" g/f	372	372	256	125
		PVDF	8 x 12 (std)				

Models	Diaphragm diameter	Stroke Length	Strokes/minute	Flow rates	Maximum Pressure
3phase 0,06 kW 1phase 0,06kW					
TM07	70	4,2	26	10,0	5 bar
			43	20,0	
			83	40,0	
			130	60,0	
		5	144	90,0	3 bar
		6,8		120,0	