

# Cleaning System

OLIMPIA

SOLENOID DOSING PUMPS



## Main characteristics

- Flow rates: from 2 to 5 l/h
- Max Pressure: up to 7 bar (101.5 psi)
- Power supply:
  - 230 Vac 50/ 60 Hz
  - 24 Vac on request
- Stroke rate: from 110 up to 140 strokes/minute
- Pump head:
  - PVDF-C
- Diaphragm: PTFE
- External Enclosure: PP
- Protection degree: IP65
- Installation kit: included

[DosingPump.ir](http://DosingPump.ir)

# Cleaning System

## Performance data

OL. BB

PERFORMANCES TEST HAS BEEN DONE AT AMBIENT TEMPERATURE, WITH WATER, AT 1,5 mt SUCTION HEIGHT

FLOW RATE	PRESSURES	CC/IMP.	CONNECTIONS	STROKES/MIN.	DIMENSIONS	PROTECTION	WEIGHT	ABSORPTION	POWER SUPPLY
2 l/h	7 bar	0,33	4x6	100	175 x 86 x 116	IP65	1,4 Kg	14 W	110-240 Vac

OL. BD 05-02

PERFORMANCES TEST HAS BEEN DONE AT AMBIENT TEMPERATURE, WITH WATER, AT 1,5 mt SUCTION HEIGHT

FLOW RATE	PRESSURES	CC/IMP.	CONNECTIONS	STROKES/MIN.	DIMENSIONS	PROTECTION	WEIGHT	ABSORPTION	POWER SUPPLY
5 l/h	2 bar	0.75	4x6	110	175 x 86 x 116	IP65	1,4 Kg	14 W	110-240 Vac

## Main applications

- Dishwasher
- Cleaning systems


DosingPump.ir

# Cleaning System

## Installation Kit


Detergent kit:

- A. Opaque hose for connecting the pump's outlet to the injection point
- B. Transparent hose for suction and for connecting the bleeding valve up for manual priming
- C. Detergent tube holder
- D. Hose connection kit
- E. Detergent and rinse-aid foot filter
- F. Wall mounting bracket
- G. Anchors for securing the pump to the wall
- H. Screw protection caps
- I. Instructions Manual

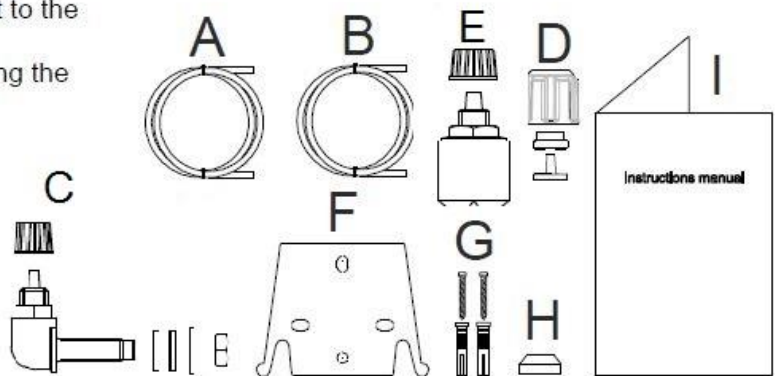

Rinse kit :

- A. Opaque hose for connecting the pump's outlet to the injection point
- B. Transparent hose for suction and for connecting the bleeding valve up for manual priming
- C. Rinse-aid injection fitting
- D. Hose connection kit
- E. Detergent and rinse-aid foot filter
- F. Wall mounting bracket
- G. Anchors for securing the pump to the wall
- H. Screw protection caps
- I. Instructions Manual

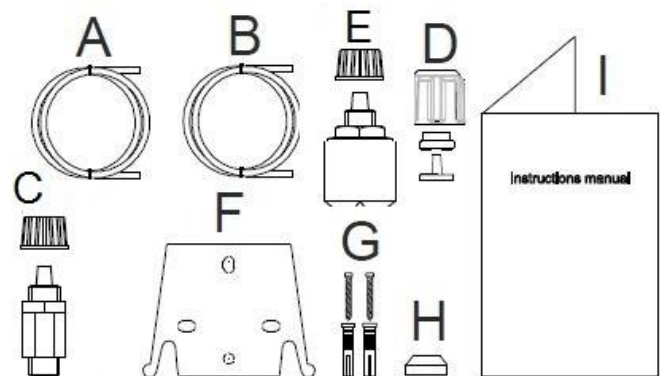


DosingPump.ir



# Cleaning System




## Accessories

AC.SL	
	<ul style="list-style-type: none"><li>• Floating level probe with bipolar cable (2 mt) with support</li></ul>

## Dimensional drawings

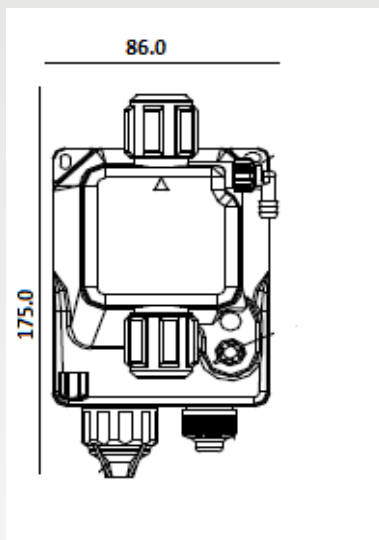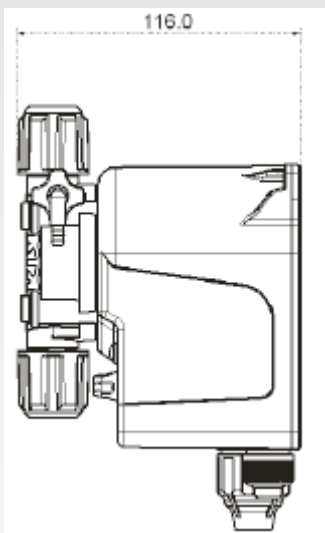

## Fixing templates

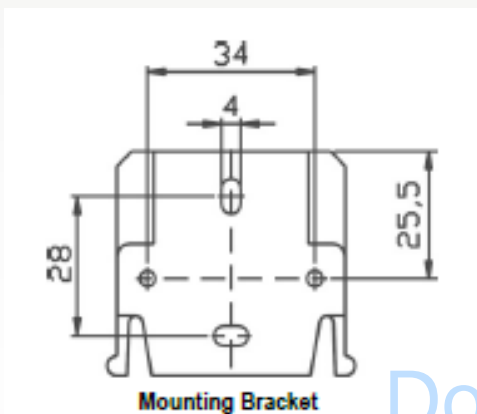

[DosingPump.ir](http://DosingPump.ir)