

SOLENOID PUMP ME2-CA

Data
Sheet


DESCRIPTION

- ✓ Analogic solenoid constant dosing pump
- ✓ Easy to Install and minimum maintainance required
- ✓ Frequency adjustable from 0 to 120 pulses per minutes by potentiometer
- ✓ **ON / OFF** function
- ✓ Reinforced PP body
- ✓ Polycarbonate front panel
- ✓ Pump head with Manual bleed
- ✓ IP 54 Protection Degree
- ✓ Standard Power Supply 230 Vac
- ✓ 100% Made in Italy
- ✓ CE approved



OPTIONAL

- ✓ SCHUKO plug
- ✓ ON/OFF switch
- ✓ PVDF pump head with PTFE seals (suitable to dose High Concentration Sodium Hypochlorite or strong Oxidizing agents)




	DESCRIPTION	
	Standard Material	Upon request
Standard Version		
Pump Head	PP 1/2"	PVDF 1/2"
Balls	Pyrex	Ceramic, PTFE, AISI 316
Diaphragm	PTFE	-----
Fittings	PP	PVDF
Seals	Viton®	EPDM
Valve Body	PP 4 x 6	PVDF 4 x 6
Foot Filter	PP 4 x 6 lip valve	PVDF 4 x 6 ball valve
Injection Valve	PP 4 x 6 ball valve	PVDF 4x6 ball valve
Suction Tube	PVC 4 x 6	PVDF
Delivery Tube	PE 4 x 6	PVDF

SOLENOID PUMP ME2-CA

Data
Sheet

TECHNICAL SPECIFICATIONS											
Standard	Max l/h	Pressure		Max cc / imp	Stroke	Solenoid	Pump Head	Power [Watt]	Pulses	Weight	
		Bar	PSI							kg.	Lbs
LIP VALVE VERSION											
05-02	05	02	29,4	0,69	1,3	Ø 80	PP	50	120	3	5,7
04-05	04	05	73,5	0,55	1,3	Ø 80	PP	50	120	3	5,7
03-07	03	07	103	0,41	1,3	Ø 80	PP	50	120	3	5,7
BALL VALVE VERSION											
1,5-11	1,5	11	162	0,21	1,1	Ø 80	PP	50	120	3	5,7
03-09	03	09	132	0,41	1,3	Ø 80	PP	50	120	3	5,7
05-05	05	05	73,5	0,69	1,3	Ø 80	PP	50	120	3	5,7
07-02	07	02	29,4	0,97	1,3	Ø 80	PP	50	120	3	5,7

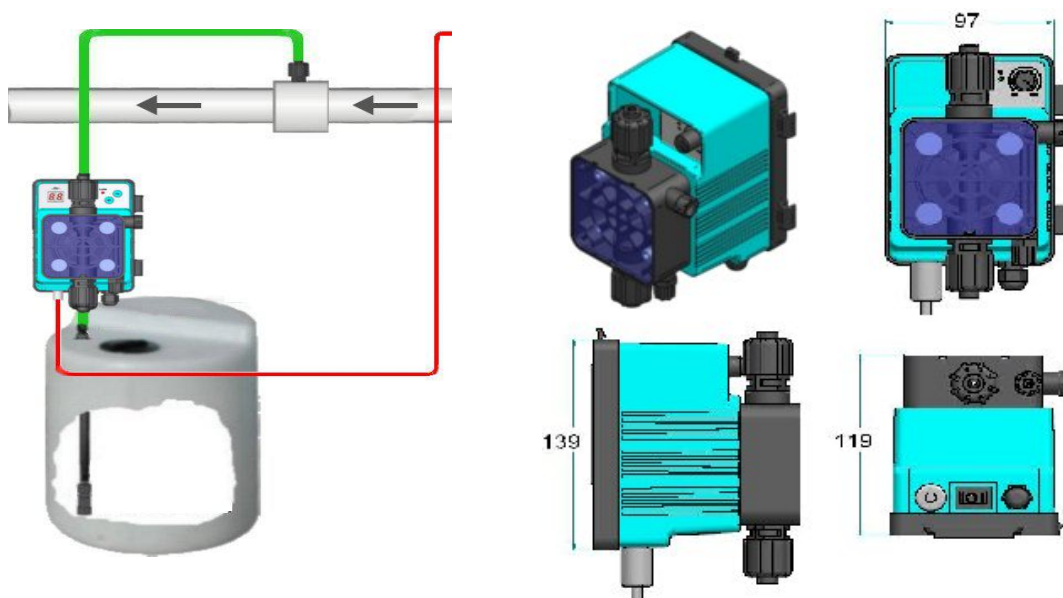

STANDARD KIT					
STANDARD KIT	Injection Valve	PP Foot filter with lip valve	Delivery tube 2mt PE 4x6	2mt PVC 4x6 Suction tube	1,5mt PVC 4x6 Bleed tube
	